

## 1443.0050


Outlet unit w. horizontal outlet 2 horizontal inlets, incl. water trap | Ø 50

Two horizontal inlets Ø40mm, which can be opened as needed. 2 rubber adapters are included so that side inlets can be reduced to 32mm.

Easy access to the removable water trap for cleaning.

Meets EN1253 standard and is VA approved.

Note: Low installation height – from 146 mm.

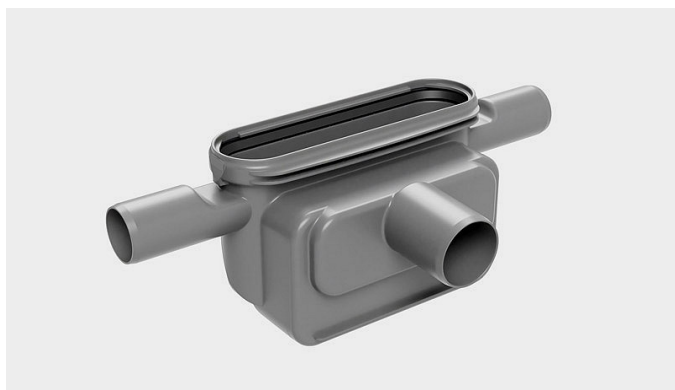


### Technické údaje

Č. POLOŽKY 1443.0050	ČÍSLO GTIN 5707692013152	HMOTNOST BEZ OBALU 800 g g
HMOTNOST VČETNĚ OBALU 650 g g	MATERIÁLY Plast (PP)	POUŽITÍ Linear drain
BARIÉRA With	TĚSNĚNÍ EPDM	HODÍ SE PRO Armatur: 1001, 1002, 1003, 1004, 1100, 3002, 3004, 5002, 5003, 4004
KAPACITA 1,4 l/s	BOČNÍ PŘÍVOD 2 sideinlets, Ø40 mm/32 mm (can be opened as needed)	

INDBYGNINGSHØJDER - LINJEARMATURER 1001, 1002, 1003, 1004

Ø	Směr odtoku	300	600	700	800	900	1000	1200
Ø 50 mm	Horizontal	146 mm	150 mm	151 mm	152 mm	153 mm	154 mm	156 mm

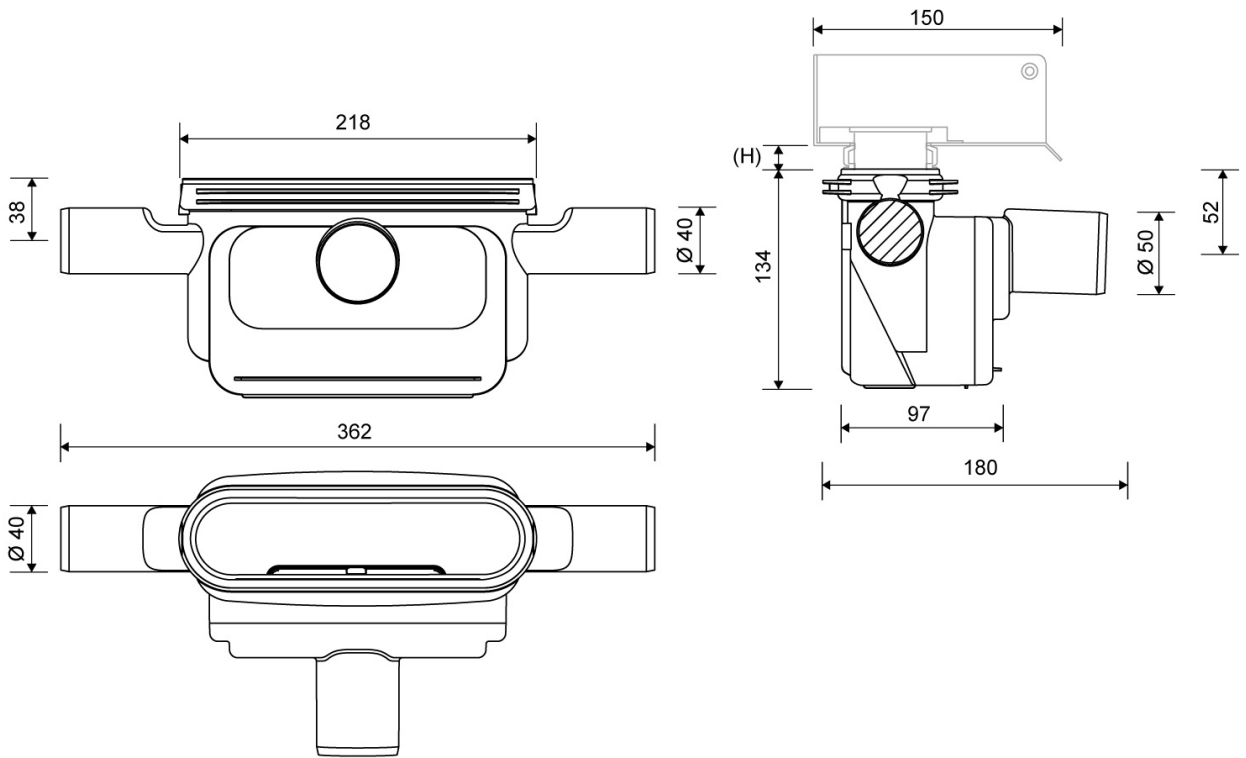

**1443.0050**

Produkty