

1443.0075

Outlet unit w. horizontal outlet, 2 horizontal inlets, incl. water trap | Ø75


Horizontal outlet unit, Ø75 mm including water trap.

Two horizontal inlets Ø40mm, which can be opened as needed. 2 rubber adapters are included so that side inlets can be reduced to 32mm.

Easy access to the removable water trap for cleaning.

Meets EN1253 standard and is VA approved.

Note: Low installation height – from 146 mm.

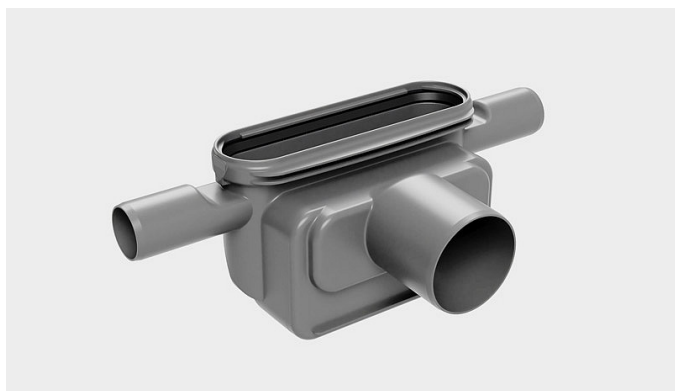


Technické údaje

Č. POLOŽKY 1443.0075	ČÍSLO GTIN 5707692013169	HMOTNOST BEZ OBALU 800 g
HMOTNOST VČETNĚ OBALU 650 g	MATERIÁLY Plast (PP)	POUŽITÍ Linear drain
BARIÉRA With	TĚSNĚNÍ EPDM	HODÍ SE PRO Armatur: 1001, 1002, 1003, 1004, 1100, 3002, 3004, 5002, 5003, 4004
KAPACITA 1,4 l/s	BOČNÍ PŘÍVOD 2 side inlets (open as needed)	

INDBYGNINGSHØJDER - LINJEARMATURER 1001, 1002, 1003, 1004

Ø	Směr odtoku	300	600	700	800	900	1000	1200
---	-------------	-----	-----	-----	-----	-----	------	------

Ø 75 mm	Horizontal	146 mm	150 mm	151 mm	152 mm	153 mm	154 mm	156 mm
---------	------------	--------	--------	--------	--------	--------	--------	--------

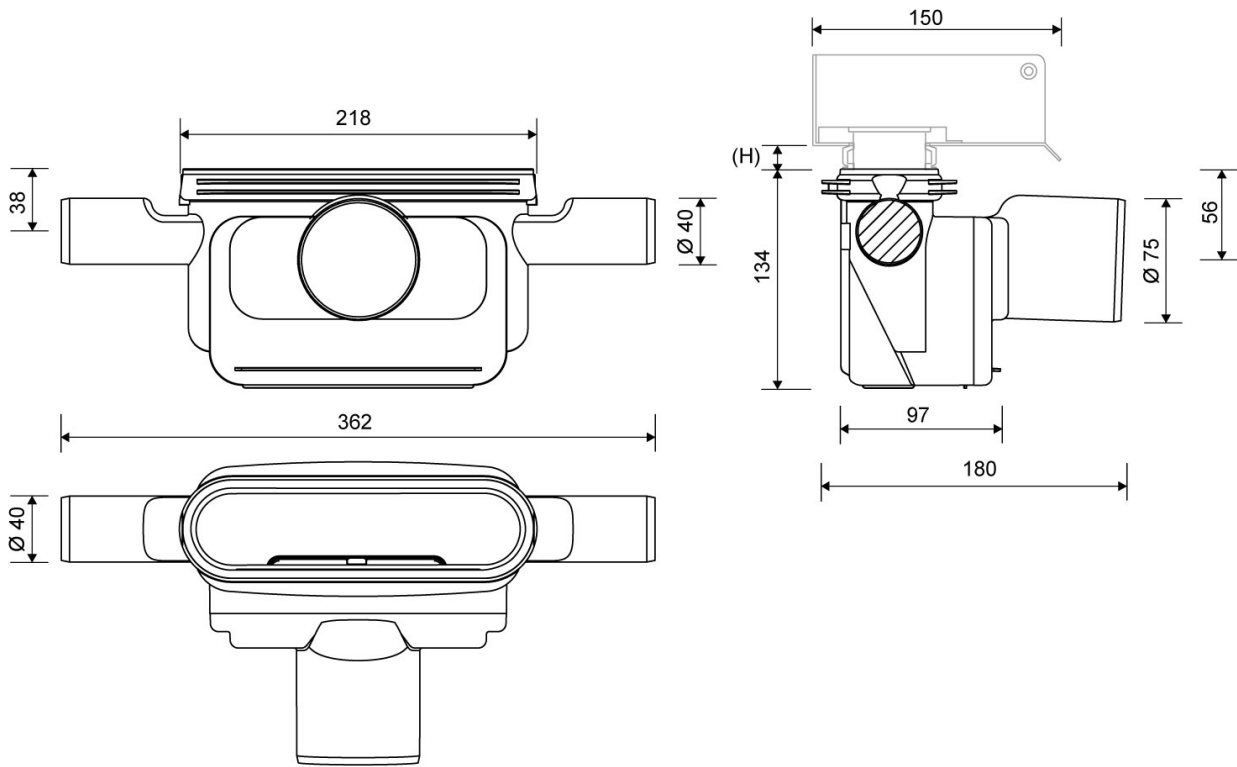

1443.0075

Produkty